

Commercial Ceiling Heater



The CCI ceiling heater is designed for commercial use in areas where no wall space is available. It provides supplemental heat to prevent cold drafts or wide temperature swings.

- **Extended Capacity:** CCI heaters are available as single or double modules with ratings up to 8,000 W and 320 CFM in 480 volt single-phase.
- **Control Options:** Heaters can be controlled by a building management system with the addition of a low voltage relay.
- **Flexible Mounting:** Units can be surface mounted, recessed or installed in T-Bar ceiling systems.

Applications

- Entryways
- Garages
- Hallways
- Restrooms
- Stairwells
- Vestibules

Standard Construction Features

Heating Elements – Steel finned tubular elements.

Outlet Grille – The louvered front grille is made of 18-gauge steel with rounded corners. The grille is finished with an epoxy-polyester powder paint in white or almond.

Built-in Controls – Automatic reset thermal cutout, fan override and 240 volt standard control, with contactor when required.

Fan Motor – Permanently lubricated, open and ventilated fan.

Installation Requirements – For best performance, do not install ceiling heaters above recommended maximum mounting height of ten feet.

Factory Built-in Options

Code	Description
D1	Disconnect Switch 600V, Three-pole, 40 Amp
D3	Disconnect Switch 277V, Double-pole, 20 Amp
R1	24V Relay
R2	24V Relay with Transformer
T1	Tamperproof Thermostat
T2	Adjustable Thermostat

Remote Room Thermostat – See page 96

Field-Installed Options

(shipped loose for field installation into heater)


Catalog Number	Description
931-124506	Surface Mounting Box (1500-4800 W)
931-158213	Surface Mounting Box (6000-8000 W)
931-124507	Thermostat Kit
931-124508	24V Relay Kit
931-124509	24V Relay Kit with Transformer, 208V
931-124510	24V Relay Kit with Transformer, 240V
931-124511	24V Relay Kit with Transformer, 277V
931-124512	T-Bar Adapter 23-3/4" x 23-3/4"

Standard colors - Add W for white finish or A for almond finish to the end of catalog number.

Special or custom colors - See inside back cover for color codes to be added to end of catalog number.

Commercial Ceiling Heater

FORCED - AIR HEATERS

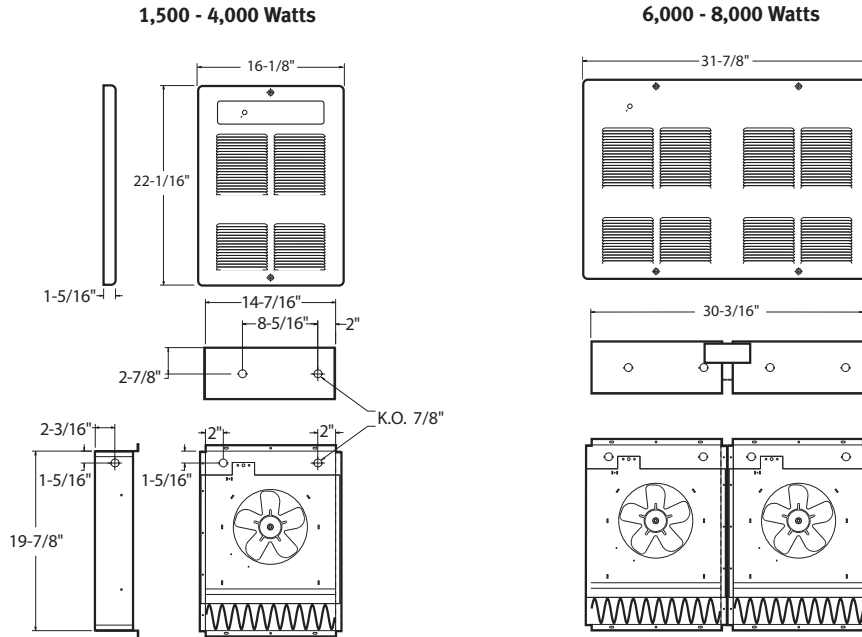

CCI Commercial Ceiling Heater Listing

Watts	Volts	Total Amps (1)	CFM	Approximate Air Temperature Rise °F (°C)	Weight lb (kg)	Catalog Number
1500	1125	6.6/5.8	160	30/27 (17/12)	20 (9)	931U01500V
	277	5.8	160	30 (17)	26 (12)	931U01500N
	480	3.5	160	30 (17)	26 (12)	931U01500T
2000	1500	8.7/7.6	160	40/30 (22/17)	20 (9)	931U02000V
	277	7.6	160	40 (22)	26 (12)	931U02000N
	480	4.5	160	40 (22)	26 (12)	931U02000T
3000	2250	12.9/11.2	160	60/45 (33/25)	20 (9)	931U03000V
	277	11.2	160	60 (33)	26 (12)	931U03000N
	480	6.6	160	60 (33)	26 (12)	931U03000T
4000	3000	17.0/14.8	160	80/60 (44/33)	20 (9)	931U04000V
	208	19.6	160	80 (44)	20 (9)	931U04000C
	277	14.8	160	80 (44)	26 (12)	931U04000N
	480	8.7	160	80 (44)	26 (12)	931U04000T
6000	4500	25.4/22.0	320	60/45 (33/25)	40 (18)	931U06000V
	277	22.1	320	60 (33)	52 (24)	931U06000N
	480	12.9	320	60 (33)	52 (24)	931U06000T
8000	6000	33.7/29.2	320	80/60 (44/33)	40 (18)	931U08000V
	208	38.9	320	80 (44)	40 (18)	931U08000C
	277	29.3	320	80 (44)	52 (24)	931U08000N
	480	17.1	320	80 (44)	52 (24)	931U08000T

(1) Total Amps includes motor amps.

All models listed are single-phase.

Standard colors - Add **W** for white finish or **A** for almond finish to the end of catalog number.

Special or custom colors - See inside back cover for color codes to be added to end of catalog number.